


COLUMN SCHEDULE (HEA 140 S275)


Mark	Conc.	Section	x (m)	y (m)	L col	Col t.	Plate top	Ba.	Conc. col.	HEA web	Bays	Face
C1	K1	HEA 140	87.19	35.77	3.001	3.046	+0.045	E	E-W 400x2.	N-S	B1	N2
C2	K2	HEA 140	92.48	35.77	3.001	3.046	+0.045	E	E-W 400x2.	N-S	B1	N2
C3	K3	HEA 140	81.89	35.67	3.007	3.052	+0.045	E	N-S 200x4.	E-W	-	N2
C4	K4	HEA 140	95.59	35.67	3.007	3.052	+0.045	E	N-S 200x4.	E-W	-	N2,E
C5	K5	HEA 140	72.09	35.27	3.031	3.076	+0.045	E	E-W 400x2.	N-S	B2	N1
C6	K6	HEA 140	67.99	35.17	3.037	3.082	+0.045	E	N-S 200x4.	E-W	-	N1,W
C7	K7	HEA 140	77.79	35.17	3.037	3.082	+0.045	E	N-S 200x4.	E-W	B2	N1
C8	K8	HEA 140	67.99	29.37	3.385	3.430	+0.045	E	N-S 200x4.	E-W	-	W
C9	K9	HEA 140	72.09	29.27	3.391	3.436	+0.045	E	E-W 400x2.	N-S	-	int
C10	K10	HEA 140	77.89	29.27	3.391	3.436	+0.045	E	E-W 400x2.	N-S	-	int
C11	K11	HEA 140	81.78	29.27	3.391	3.436	+0.045	E	E-W 400x2.	N-S	-	int
C12	K12	HEA 140	87.19	29.27	3.391	3.436	+0.045	E	E-W 400x2.	N-S	-	int
C13	K13	HEA 140	92.48	29.27	3.391	3.436	+0.045	E	E-W 400x2.	N-S	-	int
C14	K14	HEA 140	95.48	29.27	3.391	3.436	+0.045	E	E-W 400x2.	N-S	B6	E
C15	K15	HEA 140	67.99	26.37	3.565	3.610	+0.045	E	N-S 200x4.	E-W	B5	W
C16	K16	HEA 140	77.78	24.46	3.680	3.725	+0.045	E	N-S 200x4.	E-W	-	int
C17	K17	HEA 140	81.89	24.46	3.680	3.725	+0.045	E	N-S 200x4.	E-W	-	int
C18	K18	HEA 140	95.59	24.46	3.680	3.725	+0.045	E	N-S 200x4.	E-W	B6,B9	E
C19	K19	HEA 140	67.99	21.76	3.842	3.887	+0.045	E	N-S 200x4.	E-W	B5	W
C20	K20	HEA 140	77.78	21.76	3.842	3.887	+0.045	E	N-S 200x4.	E-W	B7	int
C21	K21	HEA 140	81.79	20.07	3.943	3.988	+0.045	P	E-W 400x2.	N-S	-	S2
C22	K22	HEA 140	88.88	20.07	3.943	3.988	+0.045	E	E-W 400x2.	N-S	B3	S2
C23	K23	HEA 140	95.49	20.07	3.943	3.988	+0.045	E	E-W 400x2.	N-S	B3,B9	S2,E
C24	K24	HEA 140	74.89	15.97	4.189	4.234	+0.045	E	E-W 400x2.	N-S	-	S1
C25	K25	HEA 140	67.99	15.87	4.195	4.240	+0.045	E	N-S 200x4.	E-W	B4	S1,W
C26	K26	HEA 140	71.99	15.87	4.195	4.240	+0.045	E	N-S 200x4.	E-W	B4	S1
C27	K27	HEA 140	77.78	15.87	4.195	4.240	+0.045	E	N-S 200x4.	E-W	B7	S1,EN
WP1	-	HEA 140	77.61	20.25	4.24	slott.	+0.040	post	edge beam	N-S	-	S2,EN

SCHEDULE NOTES
Column top = TOS - 0.29 (cap-plate underside); L nominal = TOS - 0.335 (25 grout + 20 plate). Column lengths are NOMINAL: cut columns to the surveyed plate-top level from the slab-top survey (S00 section 9); grout bed 25 +/- 5 mm.
Clear height 3.03 m under the cap-plate nuts at C1/C2, 3.07 m under the eave primary. Bases type E (P at K21) per S05; base plate top +0.045.
Girts Z200x2.0 on cleats (D9); rows per bay as noted; bottom row 0.50 above the slab; wall sill / base rail D11. Bays B1-B7, B9 door-free (client).

W WEST ELEV. x 67.89, north left

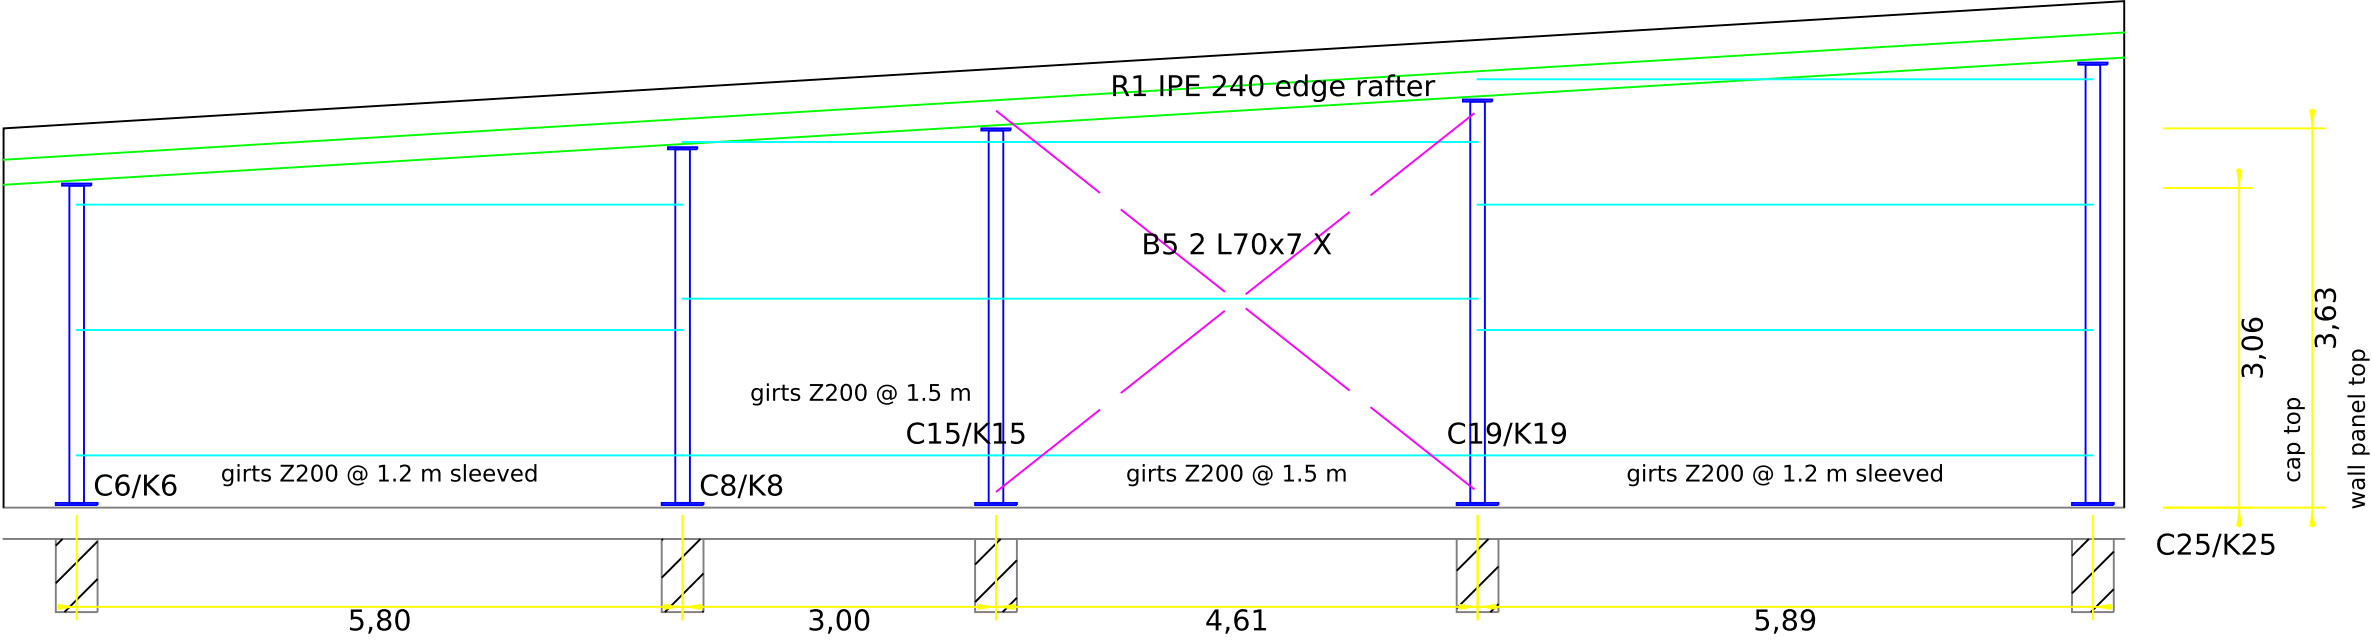


E EAST ELEV. x 95.69, north right

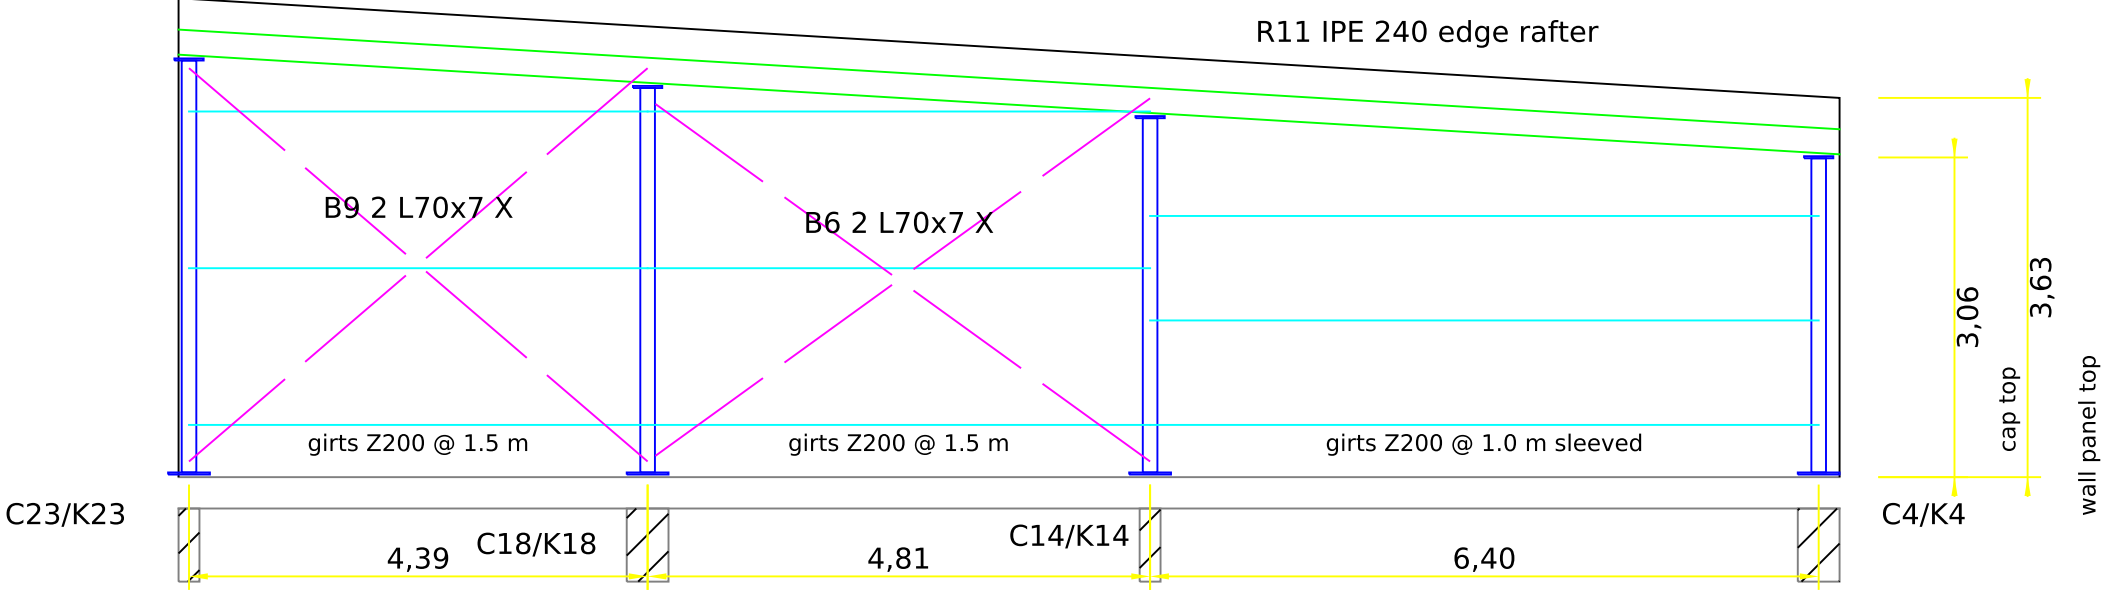


WALL HEADER 2 C200x60x2.5


N1 NORTH ELEV. WEST y 35.37

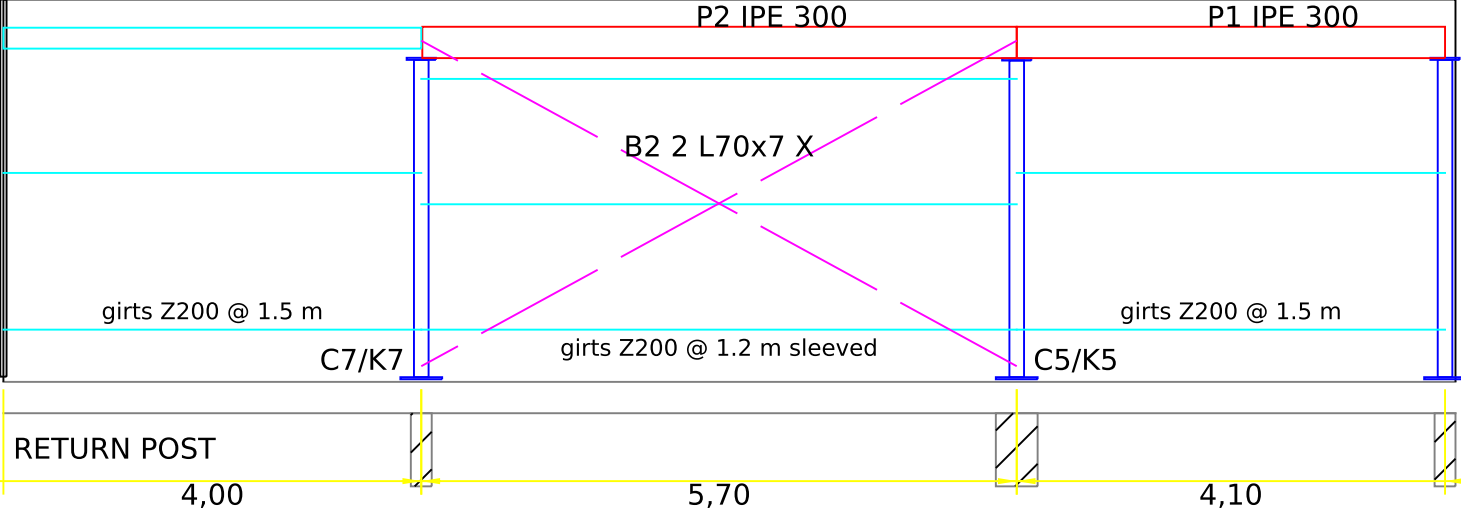


N2 NORTH ELEV. EAST y 35.87

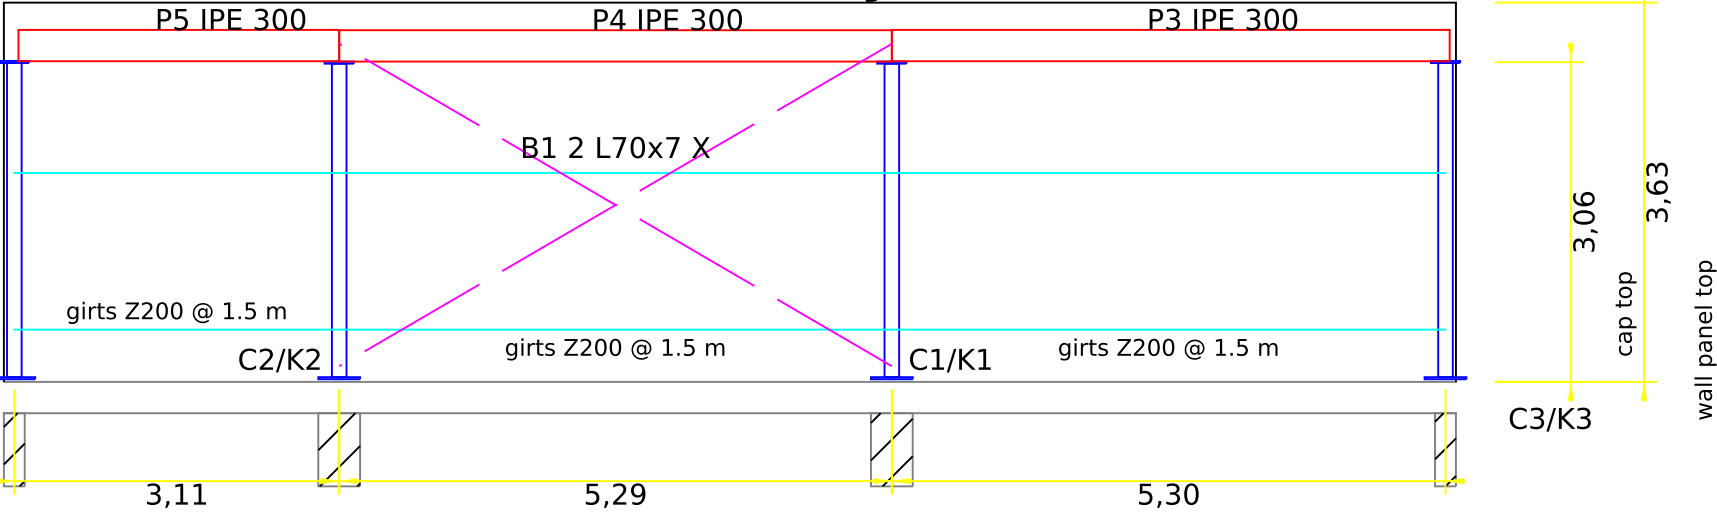


S1 SOUTH ELEV. WEST y 15.57

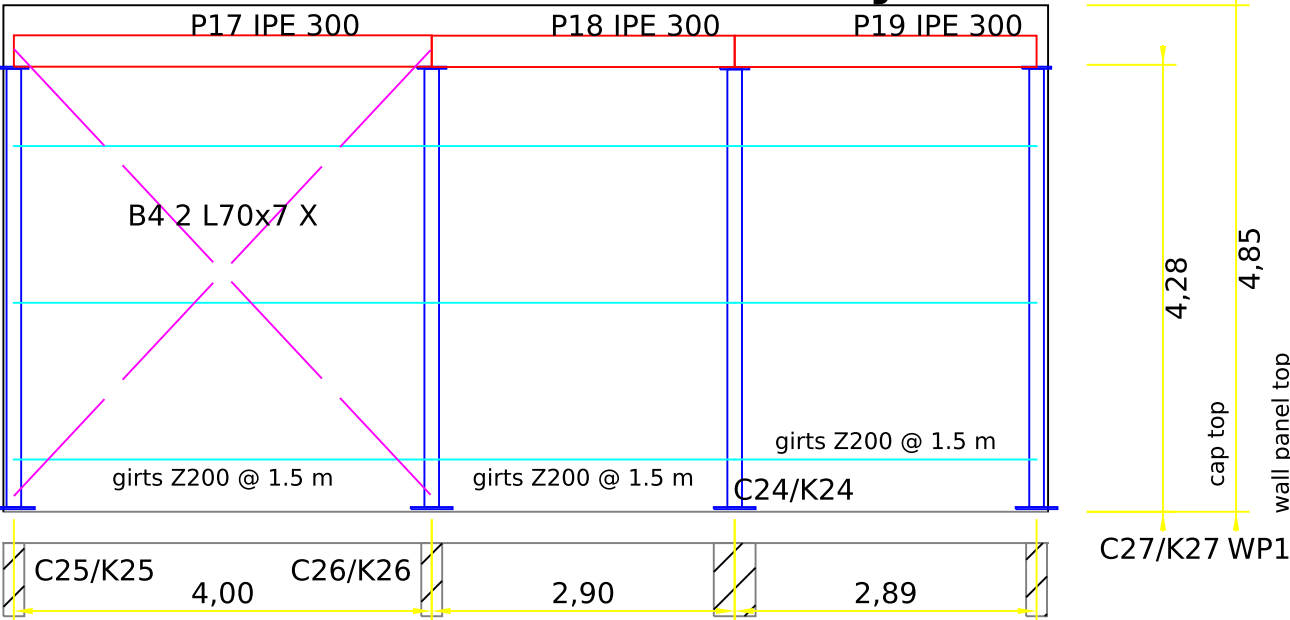

S2 SOUTH ELEV. EAST y 19.97

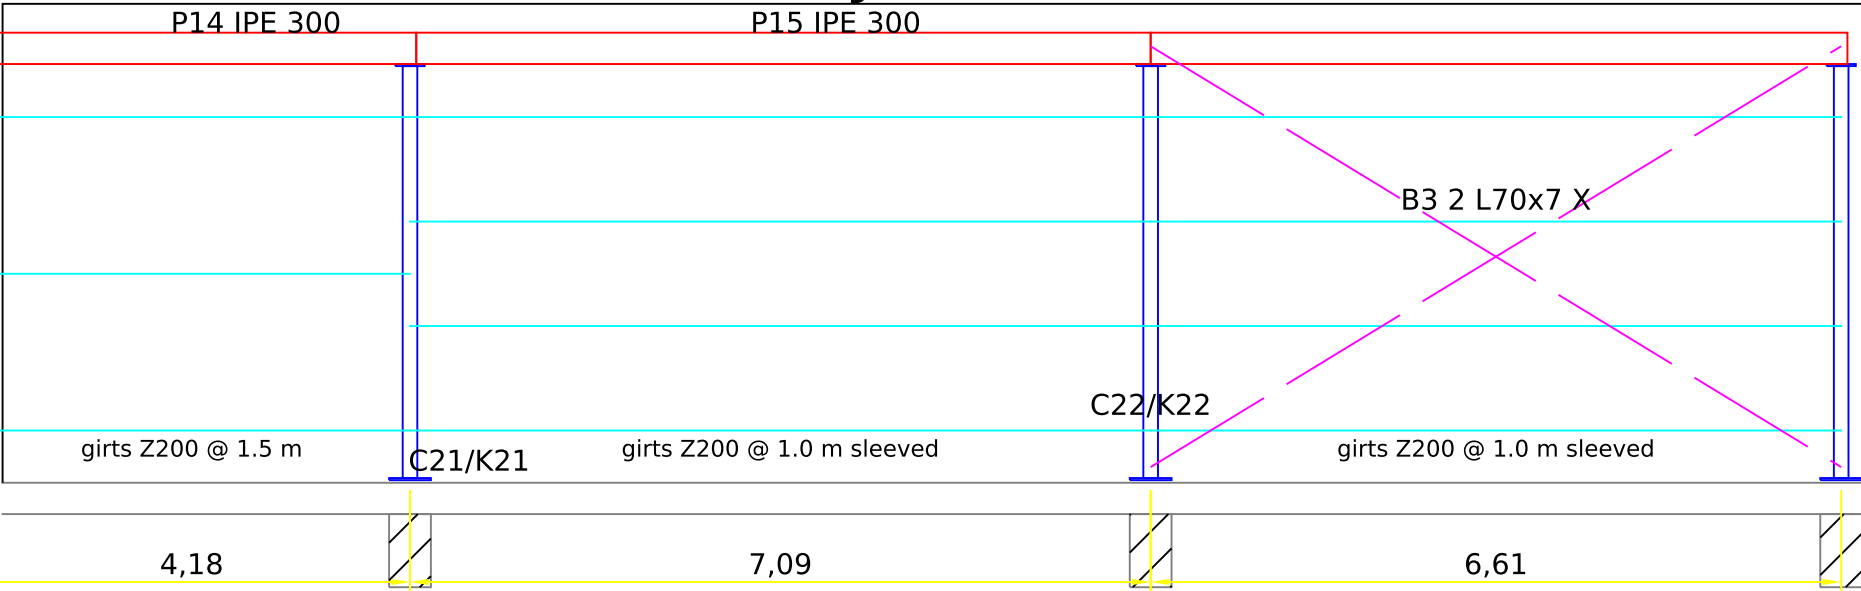

EN NOTCH FACE

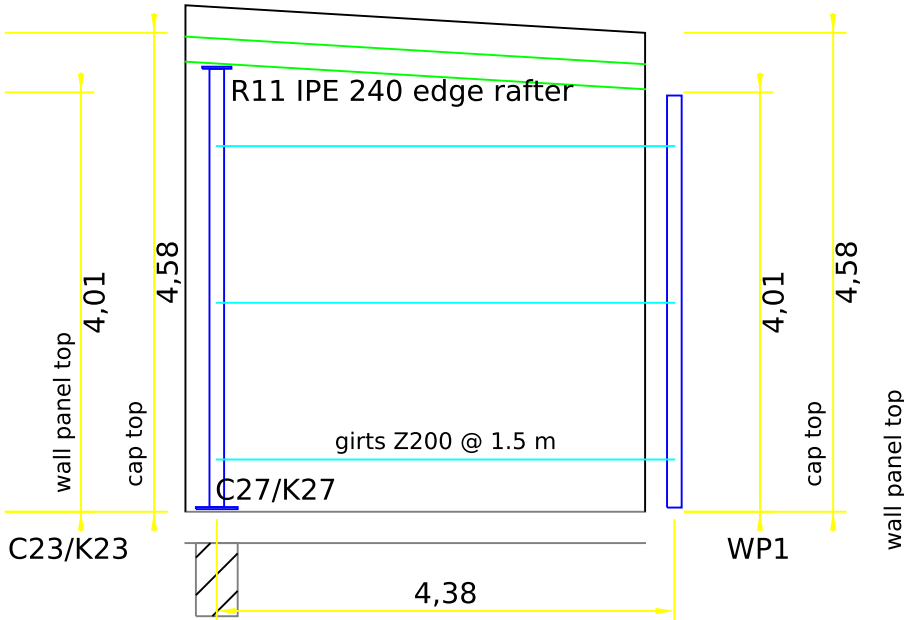

PROJECT
Steel roof - Administration Building, Regatta Tourist Village, Tripoli

ALTERNATIVE C - POST-AND-BEAM BRACED STEEL ROOF, SANDWICH PANELS
Client: Regatta Tourist Village, Tripoli Issued by: Eng. MALEK ABOZRAIG (malek.abozraig@gmail.com) Units: m

SHEET TITLE
COLUMN SCHEDULE AND WALL ELEVATIONS
Elevations 1:1 in model space (m); print 1:200 on A1
Status: ISSUED FOR CONSTRUCTION subject to the site verification of S00 section 9

REVISIONS			
3	2026-09-29	Rev 6a (IPE 300/240, HEA 140), bases Rev 8, bracing Rev 5a	
2	2026-09-28	Design Rev 3 / bases Rev 4b (critique C1-C15)	
1	2026-09-27	First issue: design Rev 2, bases Rev 3	

CURRENT REVISION
Rev 6a superstructure
Rev 8 bases / bracing Rev 5a
DATE 2026-09-29
Drawn: Designed:
Checked: Approved:

DRAWING No.
RTV-ST-S02

S02